

C0816X5R1A224M050AC

TDK Item Description : C0816X5R1A224MT****




Application & Main Feature

Commercial Grade (Low ESL Reverse Geometry)

Series

C0816 [EIA CC0306]

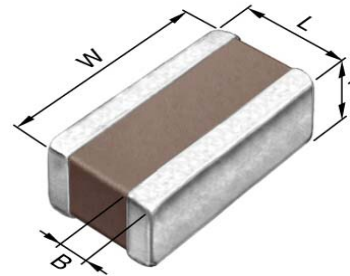

Dimensions

L 0.80mm +/-0.1mm
 W 1.60mm +/-0.1mm
 T 0.50mm +/-0.1mm
 B 0.10mm Min.

Temperature Characteristic

X5R (-55 to 85 degC +/-15%)

Rated Voltage

1A (10Vdc)

Capacitance

220nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

5% Max.


Insulation Resistance

454Mohm Min.


AEC-Q200

Not Applicable


DC Bias Characteristic

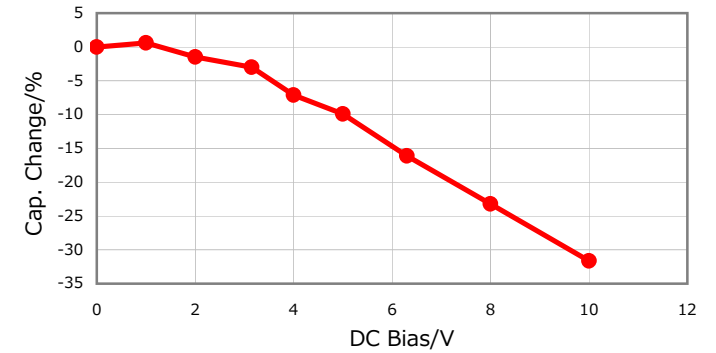


|Z|, ESR vs. Freq. Characteristics

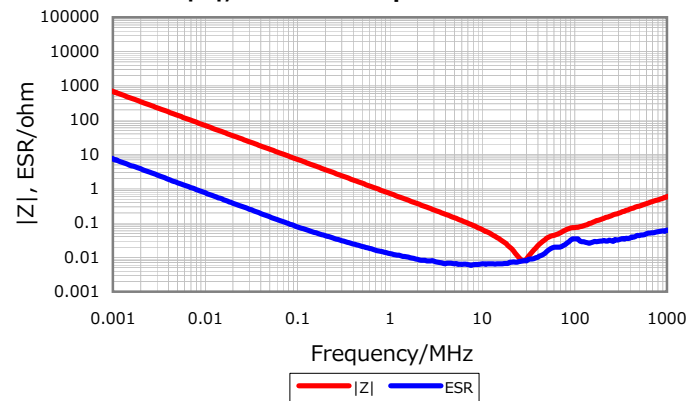


Temperature Characteristics

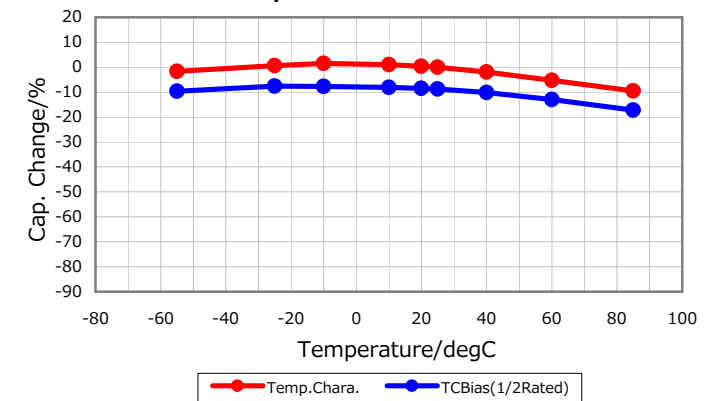

Cap. vs. Freq. Characteristic

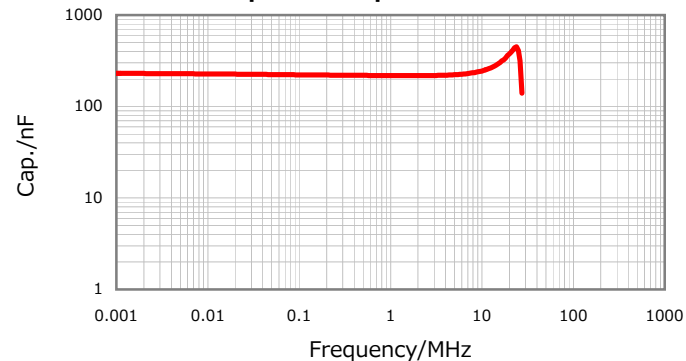

Ripple Temperature Rise Characteristics

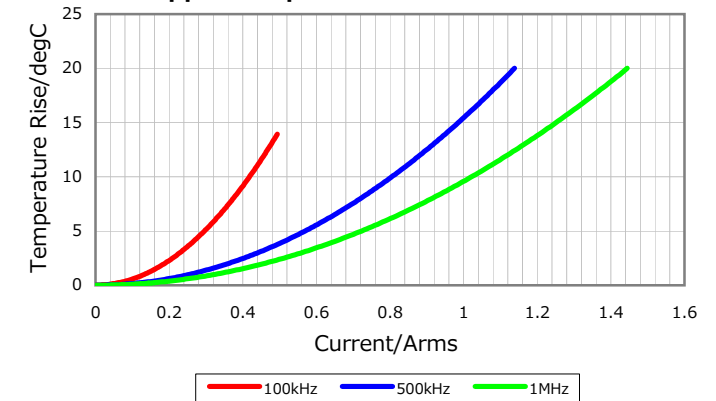

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.