



NOTES:

1. SUGGESTED MOUNTING HOLE = ϕ .120
2. HARDWARE IS INCLUDED.
3. THIS IS A LEAD FREE PRODUCT.
4. MAX. REFLOW IS 245°C FOR 5 SEC.


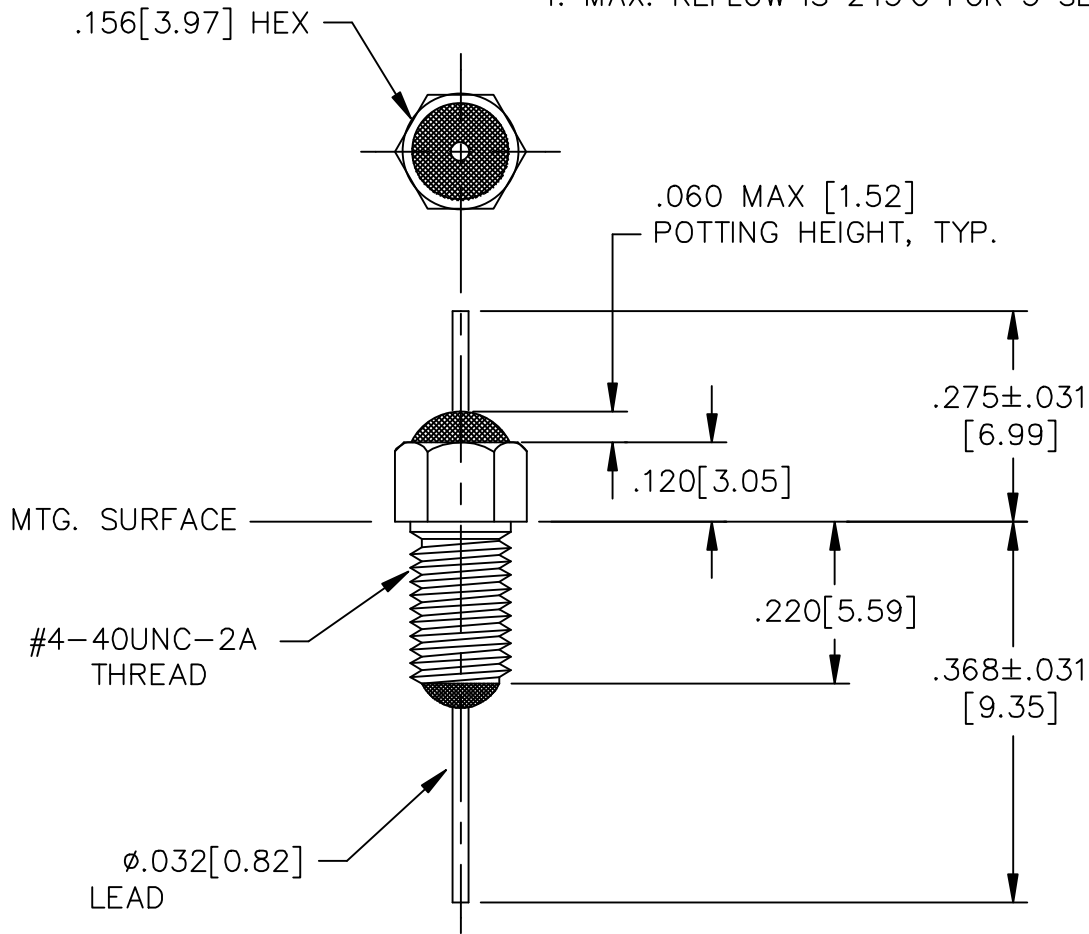


LEAD FINISH: TIN/SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	100pF MIN.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 300VDC MAX. 125°C 200VDC MAX.
D.C. RESISTANCE	.005ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
10	--
30	--
100	3
1 GHz	20
10 GHz	28



MARKING:

PART: SF101P
 BAG:
 SCI 9900F-381-6020
 DATE CODE
 LOT NO.
 QTY./BAG (100 MAX.)

					00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	FAIRVIEW PENNSYLVANIA
					CN 28747-CPD	CHANGE NOTICE	Fractions $\pm 1/64$ Dec. .xx \pm Dec. .xxx \pm .010 Angles $\pm 0^\circ 30'$		Dwn. JKAUFFMAN Date 6-15-06
							CODE IDENT. NO. QLSP2	Engr. STRUCHEN	9900F-381-6020
								 THIRD ANGLE PROJECTION	