

COIL: @ 25°C	
RESISTANCE	75 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	0.9 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.
CONTACT BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

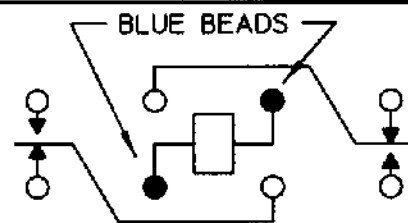

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. B.D. 6/16/99 CK. GQH 6-16-99



CUST. C. I. I. STD
CUST. NO. _____ REV. _____

07 RELAY

B07A112BB1