



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|--|------|------|-----|
| 04/02/05 | A | ADDED MATERIAL SPECS | T.B. | B.S. | |
| 05/14/05 | B | ADDED TOTAL WIRE LENGTH | T.B. | B.S. | |
| 02/29/08 | C | ADDED " ROHS COMPLIANT" | T.B. | B.S. | |
| 07/29/11 | D | ADDED MELTING POINT NOTE MTL. NYLON 6 WAS NYLON | T.B. | B.S. | |
| 05/04/12 | E | UPDATED LEAD WIRE NOTE | T.B. | B.S. | |

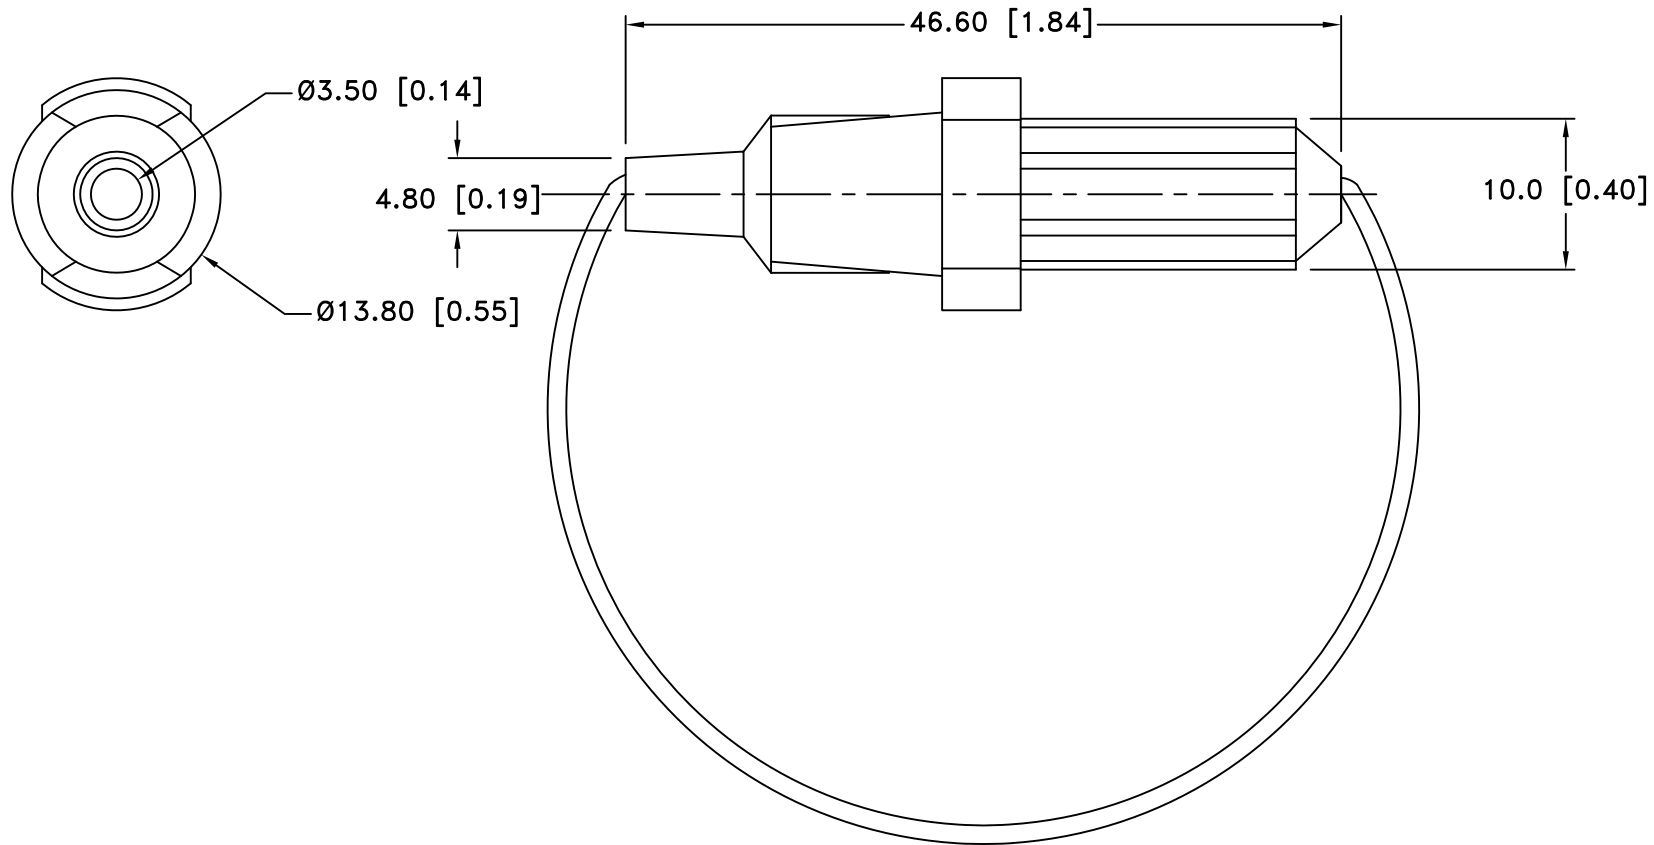

NOTES:

- MATERIAL:
HOUSING : NYLON 6, UL 94V-2, FILE NO. E338653
- LEAD WIRE IN LOOP: 16AWG, UL-CSA, 105°C, UL1015, 600V,
TOTAL LENGTH 8.125"
- MAXIMUM CURRENT: 10A
- MELTING POINT: 200°C
- INSULATION RESISTANCE AT 500V DC: 100MΩ MIN
- CONTACT RESISTANCE: 5MΩ AT 1A DC
- DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN
ROHS COMPLIANT

| | | | |
|--------------------------------|---|------------------|-------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | Scale | Drawn By B.S. |
| | | | Approved By T.B. |
| decimal ±.5 (.020) | Title FUSED POWER CORD W/PLASTIC INLINE FUSE HOLDER | | |
| Fractional ± .8 (.030) | | Date 05/04/12 | Drawing Number BF303 |
| Angular ± 3° | | | |